

American Journal of Environment Studies (AJES)



**ASSESSMENT OF BIODEGRADATION EFFECTS OF
AGRO-WASTES (POULTRY DROPPINGS AND COW
DUNG) ON SOME PHYSICO-CHEMICAL PROPERTIES OF
THEIR EFFLUENTS**

Meyiwa Stephen Chomini, Florence Osaze. Osasebor, Miriam
Ameh, Micah Kalu Peter, Akunna Emilia Chomini



**ASSESSMENT OF BIODEGRADATION EFFECTS OF AGRO-WASTES
(POULTRY DROPPINGS AND COW DUNG) ON SOME PHYSICO-CHEMICAL
PROPERTIES OF THEIR EFFLUENTS**

Meyiwa Stephen ^{1*}Chomini, Florence Osaze ¹Osasebor, Miriam ¹Ameh, Micah Kalu ¹Peter,
Akunna Emilia ¹Chomini

¹Department of Forestry Technology, Federal College of Forestry, Jos, P.M.B. 2019, Bauchi
Road, Jos, Plateau State, Nigeria.

*Corresponding author: +234 8030608552; stevemchoms@gmail.com

Abstract

Purpose: The biodegradation effects of agro-wastes (poultry droppings and cow dung) on some physico-chemical properties of the effluents were assessed.

Methodology: Triplicate slurries (1:3 w/v) of five ratios of poultry droppings and cow dung: (0:1, 1:3, 1:1, 3:1 and 1:0 as treatments A, B, C, D and E) were separately fed into 13.6L locally constructed digesters, under strict anaerobic condition. They were kept for eight weeks retention period. Separate fractions of the undigested and digested treatments were subjected to standard assay procedures to determine their C, N, heavy contents, chemical oxygen demand (COD). The average weekly temperature and the pH before and after digestion of the media were measured.

Findings: The cumulative biogas yield was in the order of treatment C (2961.0ml) > D(2241.7ml) > E(2197.9ml) > A(2079.0ml) > B(2031.1ml), based on the following mixing ratios 1:1>3:1>0:1>1:0>1:3. The gas production was affected by weekly temperature variation, which peaked at the mesophilic range (40.5±0.3–44.1±0.3°C). The resultant pH of the digestates was in the order of 1:3 > 3:1 > 1:1 > 0:1 > 1:0. There was a general reduction in heavy metal contents for all treatment digestates, except Cu, with 200.00, 35.82 and 7.34% as %increases in treatments A, E and C respectively. All treatments indicated reduction in C:N ratios, ranging from 7.93–13.02, in the order of 3:1>1:1>1:3>0:1>1:0. Similarly, there was decrease in COD contents for all treatments due to AD. Consequently, the percentage COD reduction (%CODR) was in the order of treatment D(53.70%) > E(34.15%) > C(29.63%) > A(25.81%) > B(19.23%).

Unique contribution to theory, practice and policy: The biodegradation process had provided an effective means of alternative energy production, agricultural waste management initiative, which would ensure bioremediation, sustainable public health and environmental management.

Keywords: *Anaerobic, Co-Digestion, Biogas, Cow dung, Maize Cob*

INTRODUCTION

There is a growing need for alternative energy production globally today. Renewable energy feedstock looks promising and potential option that could be explored to meet this need. Biological conversion of organic substrates to methane (CH₄) by anaerobic digestion processes powered by microorganisms generate biogas mainly methane and other trace byproducts (Burak, Paul, Orhan, & Turgut, 2010). The process has many useful benefits, including municipal and industrial waste management, environmentally sustainable and economically viable energy alternative, waste volume reduction, bio-fertilizer source, carbon-emission reduction, prevention of the transmission of pathogenic organisms from surface organic waste dumps (Ojolo, Oke, Animasahun, & Adesuyi, 2007; Chomini, Ogbonna, Falemara, & Micah, 2015). Livestock waste generations have increased with increasing demand for livestock products. Inadequate management strategies and indiscriminate disposal of these wastes and their direct applications on farmlands often pose socio-economic and environmental health risks, as they constitute ugly scenes, generate nauseating odors, breeding ground for pathogenic microbes, rodents and flies (Anhuradha, Vigayagopal, Radha, & Ramanujam, 2007; Orheruata, & Omoyakhi, 2008), as well as sources of underground and surface water pollution, ammonia and GHGs emissions, Phosphorus and heavy metal contaminations of soil and water (Hasan, Shahriar, Jim, & 2019). Although some heavy metals are required for life's physiological processes by microorganisms (components of metalloenzymes), their excessive accumulation in the living system via the food production chain, often lead to detrimental effects on human health and metal-contaminated environment (Sobolev & Begonia, 2008). The heavy metal composition of the digestates depends on the waste characteristics used for the process as well as the microbial consortiums (Bhatnagar & Kumari, 2013), and their bioremediating capacity (Bhatnagar & Kumari, 2013). According to Ahemad (2012), the essential parameters required for bioremediation (nature of pollutants, soil structure, temperature, pH, moisture content, hydrogeology, the nutritional state, redox-potential, and microbial diversity), would invariably determine the resultant concentrations of the heavy metals of the digestates (Zaidi, Khan, Wani & Ahemad, 2009). Reduction of heavy metal concentrations often characterized biogas effluents. Chomini (2017), reported that bioremediating tendency could have accounted for the reduction of Fe, Zn, Pb, Mn and Cu assayed from resultant digestates. This study therefore focuses on the quantity of biogas produced, from different ratios of mixture of poultry droppings and cow dung, while comparing the heavy metal composition of the digestates.

MATERIALS AND METHODS

Preliminary treatment of Experimental Substrates

Poultry droppings and cow dung collected from the poultry farm and the research farm of the Federal College of Forestry, Jos–Nigeria, were subjected to pre-anaerobic digestion treatments, after air drying. The substrates were thereafter mixed in five predetermined ratios (w/w)(Table 1), separately packed into sterilized black polythene bags and stored in a cool dry place below 20°C (Saev, Koumanova & Smeonov, 2009).

Table 1: Treatment description

Treatment	Description	Ratio(w/w)
A	PD + CD	0:1
B	PD + CD	1:3
C	PD + CD	1:1
D	PD + CD	3:1
E	PD + CD	1:0

PD = poultry droppings, CD = Cow dung

Slurry Preparation, Loading and Biogas Measurement

Triplicate of each of the five selected sample ratios were made into slurries by mixing 1.0kg of each with sterile distilled water in a 1:3 ratio w/v, (Ojolo *et al.*, 2007). Each of the resultant fifteen (15) experimental units (slurries) was separately fed into 13.6L capacity sterilized digesters with a thermometer and a gas delivery pipe fittings, and made air-tight to ensure anaerobic condition. They were arranged using completely randomized design (CRD) under a uniform temperature condition within an experimental cubical. Homogenous condition was maintained by one minute manual agitation of each digester daily at a regular interval, for a 56 day retention time. Weekly volume (dm³/kg) of biogas production was measured by the method downward displacement of water for eight weeks (AOAC. 1990).

Determination of Iron, Copper, Zinc, Manganase and Lead Contents of Substrates Before and After Anaerobic Digestion

Into separate 250ml conical flasks was 2.0g of each of the non-digested pulverized treatment units separately weighed. A mixture of concentrated nitric, perchloric and sulphuric acids (Hammed, Soyingbe, & Adewole, 2011) in a ratio of 5:1:1 respectively was used to digest and solubilize it by heating on a hot plate in fume cupboard to dryness at 100°C (Warren & Dela,1959). 1.0ml of HNO₃ and 3.0ml of HCl (aqua regia) were added to the digestate (Soyingbe, Hammed, Rosiji & Adeyemi, 2012). After cooling and leached with 5ml of 2M HCl, the resulting extracts was used

for the determination of Fe, Cu, Zn, Mn and Pb, with the aid of atomic absorption spectrophotometer (AAS) (APHA, 2005). The same procedure was followed for the digestates resulting from each of the experimental units after 8(WOD).

Analytical Methods

The chemical oxygen demand (COD) content of each experimental units before and after anaerobic digestion(AD) was determine using the method of (AOAC, 2005), which Incorporated Spectrophotometer DR 2800, according to 8000-Reactor.

The Kjeldahl method (Hammed *et al.*,2011) was used to determine the nitrogen content of the experimental units before and after AD. It was calculated using the formula:-

$$\% \text{ nitrogen} = \frac{(a-b) \times 0.01 \times 14 \times c}{d \times e}$$

Where:-a = titre value for digested sample; b = Titre value for the blank; c = Volume to which the digest was made up with distilled water; d= Aliquot distilled; e = Weight of dried sample.

The organic carbon (OC) composition was assessed based on standard procedure of Jagadish, MALourdu., Gavimath, & Hooli, (2011). While temperature variation during anaerobic digestion (AD) was measured using a mercury in glass thermometer (range 0 to 100⁰C) (Adebayo, Jekayinfa, & Linke, 2013) and pH(before and after AD) were measured with a digital pH meter (Model 526,Germany).

RESULTS AND DISCUSSION

Effects of Anaerobic Digestion on Biogas Yield, Temperature and pH,

Biogas generation steadily increased within the first six weeks, after which a sudden decline was observed at the 7th and 8th weeks of digestion (WOD), in all the digesters. During this period, treatment C(1:1-poultry droppings + cow dung) maintained a steady lead(621.0ml/kg), followed by treatments D(3:1- poultry droppings + cow dung), E(1:0 - poultry droppings + cow dung) B(1:3 - poultry droppings + cow dung), while A(0:1 - poultry droppings + cow dung) generated the least(393.0ml/kg). Cumulative yield was in the order of treatments C(2961.0 ml/kg) > D(2241.7 ml/kg) > E(2197.9 ml/kg) > A(2079.0 ml/kg) > B(2031.1 ml/kg) (Table 2). During the digestion period, there was a gradual rise in average weekly temperature, which peaked at the mesophilic range (40.5±0.3 - 44.1±0.3°C), with a sudden decline during the last two weeks of digestion (Table 3). These variations affected the biogas yield pattern, depending on nature of and ratio of treatment mixtures (Figure 1).

The progressive increase in biogas production with time corroborated the findings of Sambo, Etonihu and Mohammed (2015), who inclined it to availability of digestible fraction at the onset, which declined with rise in gas production. Xie, Lawlor, Frost, Hud, and Zhan (2011), reported similar steady increase in gas production up till the 6th week of digestion,(WOD), which

was followed by a sharp decreased at the 7th. They attributed this to depletion in the quality of substrate in the reactor and the rate of fermentation. Zhu, Zheng, Xu and Li (2014), suggested the effects of depletion of soluble biodegradable fractions, accumulation of volatile fatty acids and a low pH, on the yield, after an initial increase. Rajagopal, Massé and Singh (2013), opined that High concentrations of ammonia due to low C/N ratio could lead severe inhibition of methanogenesis. Abd-essamad, Qarraey and Ouattmane (2019), reported that methanogenesis inhibition depending on the nature of the substrates, inoculum, temperature, pH, and acclimation periods. The effects of mixing ratios engendered significantly ($p < 0.05$) high biogas production over single substrates. This according to Lehtomaki, Huttunen, and Rintala (2007), was attributed to a dilution effect of chemical oxygen demand and volatile fatty acid concentrations to optimal range, as well as reduction of the lag phase period of methanogenesis. Biogas yields based on the mixing ratio was in the order of 1:1>3:1>0:1>1:0>1:3. This agreed with Adelekan and Bamgboye (2009), who reported a significantly ($p < 0.05$) effect of co-digestion with mixing ratio 1:1 on gas yield. Li *et al.* (2011), maintained that co-digesting different livestock wastes with cassava peels at a mixing ratio of 1:1 had significant effect in increasing average cumulative biogas yield. Sambo *et al.* (2015), reported biogas yields was in the order of 3:1, 1:1 and 1:3 when cattle dung was co-digested with maize cob. Ofoefule, Nwankwo and Ibeto (2010), pointed that co-digestion provides positive synergisms, mainly attributed to more balanced nutrients and increased buffering capacity, bacterial diversities in different wastes and the supply of missing nutrients by the co-substrates. Misi and Forster (2001), noted other physicochemical properties like high volatile solids and sufficient pH(6.5 to 8.0) and optimization strategies provided by co-digestion to improve biogas production (Yadvika, Sreekrishnan, Kohli & Rana, 2004; Babae, Shayegan & Roshani, 2013).

The effects of temperature on biogas yield have been studied by many workers (Chae, Jang, Kim, & Yim, 2008), who posited a positive correlation between rise in temperature and yield. They reported a 43% higher methane yield at 35°C relative to 25°C. Souza, Chaguri, Castelini, Junior and Vidotti (2012), reported 65.3%, 64.0% and 62.0% as methane contents in the biogas at digestion temperature of at 35°C, 30°C and 25°C, respectively. They opined that decrease in temperature had a negative effect on the microbial metabolic rate, leading to sharp COD decreased, 40% and 39% drop in gas production and volatile solids (VS) removal. This effects of sudden temperature drop was observed in the present study at the 6th week, which considerably affected the gas yield pattern across the treatments (Figure 1). This corroborated the findings of Chae *et al.* (2008), who described similar scenario as breakpoint, the beginning of biological stress, beyond which the methane production rate decreased sharply (Saev *et al.*, 2009).

The average pH value of the treatment slurries ranged from 8.15±0.03 to 9.56±0.02 before AD, with treatments A and E having the highest and lowest values respectively. After AD, all treatment digestates recorded a reduction in resultant pH values, ranging from 6.62±0.04 to 8.85±0.01 except treatment D. All co-substrates had higher resultant pH values than the mono-

substrates (Figure 2). Different workers have reported different pH ranges, depending on the types of substrates and other operating conditions (Makádi, Tomócsik. & Orosz, 2012; Umar, Firdausi, Sharifah, & Fadimtu, 2013). The drop in pH values was attributed to increased volatile fatty acids production by acidogenic bacteria, during hydrolysis and acidogenesis (Ofoefule, 2010; Satisha & Devarajan, 2007). The reduction inhibits the acidification, destroy methanogenic bacteria activity and leads to failure of digester ultimately. The increase in pH as observed in digestate of treatment D, has been attributed to rapid metabolic degradation of organic acids and intense proteolysis which releases ammonia (Baharuddin, *et al.*, 2009a). Similar pattern of pH profile was obtained by Ayu, and Aryanti(2010). Chae *et al.* (2008), opined that pH depression, which suppresses biogas formation could be enhanced by buffering to raise the pH to around neutral or alkalinity, usually preferred by methanogens (Dioha, Ikeme, Naff'u, Soba & Yusuf, 2013). The resultant pH of the digestates was in the order of 1:3 > 3:1 > 1:1 > 0:1 > 1:0, suggesting superior buffering effects of co-digestion on degradation media, making it conducive for the methanogens and methanogenesis (Zhang *et al.*, 2013). Zhang *et al.*(2013), showed that co-digestion of organic wastes enhances a reduction in carbon-to-nitrogen (C/N) ratio, which engenders ammonia build-up, increase pH and methanogenic activity.

Effects of Anaerobic Digestion on Some Heavy Metals

Before anaerobic digestion (AD), treatment E had the highest copper (Cu, 33.50mg/kg), manganese (Mn, 296.00mg/kg) and zinc(Zn, 846.50mg/kg), while treatment C was in iron(Fe, 1988.50mg/kg) and lead(Pb, 147.25mg/kg) respectively. Treatment A recorded the least contents of Cu, Mn, Zn, and Fe, while D had the least of Pb. After AD, there was a general reduction in contents of the metals for all treatment digestates, except Cu in treatments A, E and C with percentage increase of 200.00, 35.82 and 7.34% respectively (Table 4).

The reduction in the levels of the heavy metals occasioned by anaerobic digestion, agrees with the findings of (Ghasimi, Idris, Chuah & Tey, 2009), indicating that these elements were needed for normal growth of bacteria involved in anaerobic digestion(AD) of organic wastes. Insufficient supply of these nutrients in the digestion medium should therefore be compensated for by applying smaller nutrient loads otherwise a reduced efficiency of the system would result (Sperling & Cherincharo, 2005). The increase in Cu level after AD, corroborated the reports of Zaleckas, Sendžikienė and Čiutelytė (2012), who related the increase to the nature of the organic substrates. Zayed & Winter (2000), have found that methanogens are more inhibited when exposed to heavy metals than acidogens, while some heavy metals are more toxic to anaerobic bacteria than others during acidogenesis and methanogenesis. Lin (1993) found Cu to be the most toxic metal to anaerobic bacteria, among six different metals studied while Pb was the least. Manganese is required by microbes for the formation of manganese peroxidase, an enzyme which aids in the

Lignin and lingo-cellulosic degradation (Isroi *et al.*, 2011). Sobolev & Begonia (2008), reported that microbial community under co-digestion could experience selective inhibition by heavy metal due to different tolerant levels leading to stratification of the community structurally and functionally. This, as stressed by Fulladosa, Murat, Martínez & Villaescusa (2005a) and Fulladosa, Murat and Villaescusa (2005b), could disrupt some microbial pathways, making them more sensitive to some metals than others, resulting in selective inhibition. This could result in decline of both numbers and diversity of organisms relying on those pathways (Holtan-Hartwig, Bechmann, Høyås, Linjordet, Bakken, 2002).

Effects Of Anaerobic Digestion On Carbon – Nitrogen Ratio and Chemical Oxygen Demand (COD) Contents of the Digestates

The organic carbon(OC) and total nitrogen (TN) content of the treatments were A(35.75% and 1.94%), B(45.33% and 2.12%), C(31.92% and 2.49%), D(51.71% and 2.51%) and E(37.03% and 2.59), giving a carbon – nitrogen (C/N) ratios in the order of B(21.38) > D(20.60) > A(18.43) > E(14.30) > C(12.82). However, after digestion all treatment digestates recorded a remarkable reduction in the C/N ratio ranging from 7.93 to 13.02. Digestate of treatment D and E had the highest (59.27%) and least(12.94%) %C/N reduction respectively (Table 5). All the mixed substrates indicated higher values of %C/N reduction than the single substrates in the following order 3:1 > 1:1 > 1:3 > 0:1 > 1:0.

The C/N ratios obtained for the substrates prior to digestion were similar to Ghasimi, *et al.*,(2009), stressing that an excessively high C/N ratio would increase acidity of the medium which retards methanogenesis. Excessive N obtained from very low C/N ratio is converted to ammonium-N at a faster rate than it can be assimilated by the methanogens, leading to NH₃ poisoning. On the contrary, a very high C/N ratio meant higher acidity of digesting medium which retards methanogenesis. Co-digestion condition has been reported to balance the negative effects arising from both extremes (too high and too low) C/N ratios (Ofoefule, *et al.*, 2010). This is due to its capacity to provide buffering conditions for the degradative microbes. This could have informed the pattern of results in the study.

There was a general reduction in chemical oxygen demand (COD) contents of all substrates after anaerobic digestion (AD). The AD effected a decrease in COD contents from a range of 26x10³ to 54x10³ before digestion to 19x10³ to 27x10³ after AD. Consequently, the percentage COD reduction (%CODR) was in the order of treatment D(53.70%) > E(34.15%) > C(29.63%) > A(25.81%) > B(19.23%). Between the two single substrates, poultry droppings (E) had a better %CODR than the cow dung (A) (Table 5).

The efficiency of the anaerobic process was described in terms of biological conversion of the substrates based on volatile solids (VS) or COD removal (Jha, Li, Zhang, Ban & Jin, 2013). Thus, the quantitative differential of COD before and after AD, is indicative of its removal or

reduction, which invariably is equivalent to organic material converted into biogas by methanogens (Sumardiono, Syaichurrozi, Budiyo & Sasongko, 2013). Co-digestion has been reported to give higher CODR than single substrates (Kassuwi, Mshandete & Kivaisi, 2012; Jha *et al.*, 2013). Although the current study gave a CODR favored by high substrate mixing ratio (3:1), however, the ratio 1:1 generated the highest cumulative biogas. This indicated that other prevailing factors in the digesting medium might have resulted in low gas production. Kassuwi (2012)], reported similar scenario, which was described as antagonism condition, where co-substrates condition(s) intended to work against inhibition rather promoted it, resulting into relative reduction in gas production. This could be attributed to delay in recovery from shock due to sudden drop in temperature

CONCLUSION AND RECOMMENDATION

The biodegradative capacity of co-digested poultry droppings and cow dung to generate biogas reflected the process efficiency. Cumulative biogas production was in the order of treatments C(2961.0 ml/kg) > D(2241.7 ml/kg) > E(2197.9 ml/kg) > A(2079.0 ml/kg) > B(2031.1 ml/kg). The gas production was affected by temperature variation, while the resultant pH of the digestates was in the order of 1:3 > 3:1 > 1:1 > 0:1 > 1:0. There was a general %reduction in heavy metal contents of the digestates, except Cu. The process effected various % reductions in C/N ratio and COD. Co-substrates had higher C/N reduction in the order of 3:1 > 1:1 > 1:3 > 0:1 > 1:0, while CODR was in the order of 3:1 > 1:0 > 1:1 > 0:1 > 1:3. The anaerobic digestion co-digested of poultry droppings and cow dung has engendered reduction in heavy metal, thereby revealing its bioremediating potential. Consequent upon these findings, it is recommended that trials with other agricultural and industrial organic wastes at different mixing ratios be conducted to unbundle their biomethanation potentials as alternative energy sources.

REFERENCES

- Abd-essamad M., Qarraey, I. and Ouattmane, A(2019). Anaerobic Codigestion of Urban Solid Waste Fresh Leachate and Domestic Wastewaters: Biogas Production Potential and Kinetic. *Environ. Eng. Res.* 24(1), 38-44.
- Adebayo, A. O., Jekayinfa., S. O. & Linke, B. (2013). Effect of co-digestion on anaerobic digestion of cattle slurry with maize cob at mesophilic temperature. *Journal of Energy Technologies and Policy*, 3(7), 47-54.
- Adelekan, B. A. & Bamgboye, A. I. (2009). Comparison of biogas productivity of cassava peels mixed in selected ratios with major livestock waste types. *African Journal of Agricultural Research*, 4 (7), 571-577.
- Ahemad, M. (2012). Implications of Bacterial Resistance Against Heavy Metals In Bioremediation: A Review. *IIOAB Journal*, 3(3), 39-46.

- Anhuradha, S. G, Vigayagopal, V. Radha, P. & Ramanujam, R. (2007). Kinetic studies and anaerobic co-digestion of vegetable market wastes and sewage sludge. *Clean* 35 (2) 197 – 199. [www. Clean – Journal. Com](http://www.Clean – Journal. Com).
- AOAC. (1990). Official Methods of Analysis. Association of Official Analytical Chemists, 15th ed Washington DC. USA. pp. 123-126.
- AOAC (2005). Official Methods of Analysis, 18th ed., Association of Official Analytical Chemist, Washington, DC, 1168p.
- APHA, (2005). Standard Method for Examination of Water and Wastewater. American Public Health Association, Washington, D. C..1368p.
- Ayu, A.O., & Aryanti, V. D.(2010). Biogas Production Using Anaerobic Biodigester from Cassava Starch Effluent With Ruminant Bacteria As Biocatalyst. Master Thesis. Diponegoro University, Indonesia.
- Babae, A., Shayegan, J. & Roshani, A.(2013). Anaerobic slurry co-digestion of poultry manure and straw: effect of organic loading and temperature. *Journal of Environmental Health Sciences & Engineering*. 11:15.
- Baharuddin, A. S., Wakisaka M., Shirai, Y, Abd-Aziz, S., Abdul-Rahman N. A. & Hassan, M. A. (2009a). Co-composting of empty fruit bunch and partially treated palm oil mill effluent in pilot scale: *International. Journal of Agricultural Research*, 4, 69-78.
- Bhatnagar S. & R. Kumari (2013). Bioremediation: A sustainable tool for environmental management – A Review. *Annual Review and Research in Biology*, 3(4), 974-993.
- Burak D., Paul, S., Orhan, Y., & Turgut, T. O.(2010). Production of Methane and Hydrogen from Biomass Through Conventional and High-Rate Anaerobic Digestion Processes. *Journal Critical Reviews in Environmental Science and Technology*. 116-146.
- Chae, K.J., Jang, A, Kim, I.S., Yim, S.K.(2008). The effect of digestion temperature and temperature shock on the biogas yields from the mesophilic anaerobic digestion of swine manure. *Bioresour Technol*, 99:1–6.
- Chomini, M.S., Ogbonna, C.I.C., Falemara, B.C. & Micah, P. (2015). Effect of Co-Digestion of Cow Dung and Poultry Manure on Biogas Yield, Proximate and Amino Acid Contents of Their Effluents e-ISSN: 2319-2380, p-ISSN: 2319-2372. 8 (11) I (Nov. 2015), PP 48-56 www.iosrjournals.org
- Chomini, M.S. (2017). Comparative Studies on Biogas Production From Some Selected Indigenous Substrates and The Effects of Their End-Products on Growth and Performance of *Zea mays L.*(Maize). (Ph.D Thesis), University of Jos. p. 292.
- Dioha, I. J., Ikeme, C.H., Nafiu T., Soba, N.I. & Yusuf, M.B.S. (2013). Effect of Carbon to Nitrogen Ratio on Biogas Production. *International Research. Journal of Natural. Sciences*, 1(3), 1-10.
- Fulladosa, E., Murat, J. C., Martínez, M. & Villaescusa, I. (2005a). Patterns of metals and arsenic poisoning in *Vibrio fischeri*. *Chemosphere*, 60, 43-48.
- Fulladosa, E., Murat, J. C. & Villaescusa, I. (2005b). Study on the toxicity of binary equitoxic mixtures of metals using the luminescent bacteria *Vibrio fischeri* as a biological target. *Chemosphere*. 58, 551-557.
- Ghasimi, S. M. D., Idris, A., Chuah, T. G. & Tey, B. T. (2009). The Effect of C:N:P ratio, volatile fatty acids and Na⁺ levels on the performance of an anaerobic treatment of fresh leachate

- from municipal solid waste transfer station. *African Journal of Biotechnology*, 8 (18), 4572-4581.
- Hammed, T. B., Soyngbe, A. A. & Adewole, D. O. (2011). An Abattoir waste water management through composting: A case study of alesinloye waste recycling complex. *The International Journal of Interdisciplinary Social Sciences*,6(2) : 67-78.
- Hasan, k., Shahriar, A., Jim, K.U.(2019). Water pollution in Bangladesh and its impact on public health. *Heliyon* 5,1-23.
- Holtan-Hartwig, L., Bechmann, M., Høyås, T. R., Linjordet, R. & Bakken, L. R. (2002). Heavy metals tolerance of soil denitrifying communities: N₂O dynamics. *Soil Biology and Biochemistry*, 34, 1181-1190.
- Jagadish H. P., MALourdu A.R., Gavimath, C. C. and Hooli, V.R.(June-2011). A Comparative Study on Anaerobic Co-Digestion of Water Hyacinth With Poultry Litter and Cow Dung. *International Journal of Chemical Sciences and Applications*. 2(2), 148-155.
- Jha,A.K. Li, J., Zhang, L., Ban, Q. and Jin, Y. (2013). Comparison between Wet and Dry Anaerobic Digestions of Cow Dung under Mesophilic and Thermophilic Conditions. *Advances in Water Resource and Protection (AWRP)*,1(2),28-38.
- Isroi, M. R., Syamsiah, S., Niklasson, C., Cahyanto, M. N., Lundquist, K.& Taherzadeh, M. J. (2011). Biological Pretreatment of Lignocelluloses with White-Rot Fungi and Its Applications: A Review. *Bioresources*, 6(4), 5224-5259.
- Kassuwi S. A. A., Mshandete A. M. and Kivaisi A. K.(December 2012). Anaerobic Co-Digestion of Biological Pre-Treated Nile Perch Fish Solid Waste With Vegetable Fraction of Market Solid Waste. *Arpn Journal of Agricultural and Biological Science*. 7 (12),1016-1031.
- Lehtomaki, A., Huttunen, S. & Rintala, J. A. (2007a). Laboratory investigations on co-digestion of energy crops and crop residues with cow manure for methane production: Effect of crop to manure ratio. *Resource Conservation and Recycling*, 51 (3): 591-609.
- Li, J., Jha, A. K., He, J., Ban, Q., Chang, S. & Wang, P. (2011). Assessment of the effects of dry anaerobic codigestion of cow dung with waste water sludge on biogas yield and biodegradability. *International Journal of the Physical Sciences*, 6(15), 3723-3732.
- Lin, C. Y. (1993). Effect of heavy metals on acidogenesis in anaerobic digestion. *Water Research*, 27, 147–152.
- Makádi, M., Tomócsik, A. & Orosz, V. (2012). Digestate: A New Nutrient Source - Review, Biogas, Dr. Sunil Kumar (Ed.), InTech, pp 295-310.
- Misi, S. N. & Forster, C. F. (2001). Batch co-digestion of multi-component agro-wastes. *Bioresource Technology*, 80, 19-28.
- Ofoefule, A. U., Nwankwo, J. I. & Ibeto, C. N. (2010). Biogas Production from Paper Waste and its blend with Cow dung. *Advances and Applied Sciences Research*, 1 (2), 1-8.
- Ojolo, S. J., Oke, S. A., Animasahun, K. & Adesuyi, B. K. (2007). Utilization of poultry, cow and kitchen wastes for biogas production: A comparative analysis. *Iranian Journal of Environmental Health, Science and Engineering*, 4 (4), 232-228.
- Orheruata, A.M. and Omoyakhi, J.M. (2008): Livestock-Environment Interaction: Issues and options in Nigeria. *Journal of Appl. Sci. Environ. Manage.* 12(2) 129 – 133.
- Rajagopal, R., Massé, D.I., Singh, G., (2013). A critical review on inhibition of anaerobic digestion process by excess ammonia. *Bioresour. Technol.* 143, 632–641.

- Sambo, A. S., Etonihu, A. C. And Mohammed, A. M.(November, 2015). Biogas Production From Co-Digestion of Selected Agricultural Wastes in Nigeria. *International Journal of Research – Granthaalayah*. 3 (11),7-16.
- Saev, M., Koumanova, B. & Smeonov, N. (2009). Anaerobic co-digestion of wasted tomatoes and cattle dung for biogas production. *Journal of the University of Chemical Technology and Metallurgy*, 44 (1), 55-60.
- Satisha, G. C. & Devarajan, L. (2007). Effect of amendments on windrow composting of sugar industry pressmud. *Waste Management*, 27, 1083-1091.
- Sobolev, D. & Begonia, M. F. T.(2008). Effects of Heavy Metal Contamination upon Soil Microbes: Lead-induced Changes in General and Denitrifying Microbial Communities as Evidenced by Molecular Markers. *Int. J. Environ. Res. Public Health* 2008, 5(5) 450-456.
- Souza, A. M., Chaguri, M. P., Castellini, F. R., Junior, J. d. L. & Vidotti, R. M. (2012). Anaerobic bio-digestion of concentrate obtained in the process of ultra filtration of effluents from tilapia processing unit. *Research of Brassilian Zootechnology*, 41(2), 242-248.
- Soyingbe, A. A., Hammed, T. B., Rosiji C. O. & Adeyemi, J. K. (2012). Evaluation of fluted pumpkin (*Telfairia occidentalis* Hook f.) Waste as nutrient amendment in compost for its effective management and crop production. *Journal of Environmental Science, Toxicology and Food Technology*,1(1), 32-38.
- Sperling, V. M, & Cherincharo C. A. L. (2005). Principles of anaerobic digestion. In: Biological Waste Water Treatment in Warm Climate Region, 1st edition. IWA publishing, London, UK. 835p.
- Sumardiono,S., Syaichurrozi, I., Budiyo, B and Sasongko, S. B. (2013). The Effect of COD/N Ratios and pH Control to Biogas Production from Vinasse. *International Journal of Biochemistry Research & Review*, 3(4), 401-413.
- Umar, H. S., Firdausi, B. R., Sharifah, R. W. A. & Fadimtu, M. (2013). Biogas production through co-digestion of palm oil mill effluent with cow manure. *Nigerian Journal of Basic and Applied Science*, 21(1), 79-84.
- Warren, H. V. & Dela, V. R. E. (1959). Aqua regia extractable copper and zinc in Platonic rocks in relations to ore deposit. *Trans. Sect. B.*, 69: 495-504.
- Xie, S., Lawlor, P. G., Frost, J. P., Hud, Z. & Zhan, X. (2011). Effects of pig manure to grass silage ratio on methane production in batch anaerobic co-digestion of concentrated pig manure and grass silage. *Bioresource Technology*, 102, 5728–5733.
- Yadvika., S., Sreekrishnan, T. R., Kohli, S. & Rana, V. (2004). Enhancement of biogas production from solid substrates using different technique. *Bioresource Technology*, 95, 1–10.
- Zaleckas, E., Sendžikienė, E. and Čiutelytė, R.(2012). Evaluation of Heavy Metals Influence on Biogas Production. *Environmental Research, Engineering and Management*. 4(62), 14-20.
- Zaidi, A, Khan, M.S., Wani, P.A., Ahemad, M. (2009). Bioremediation of heavy metals by plant growth promoting rhizobacteria. In: Microbes in sustainable agriculture, Khan MS, Zaidi A, Musarrat J, (eds.) *Nova Science Publishers*, New York, USA, p. 55–90.
- Zayed, G. & Winter, J., (2000). Inhibition of methane production from whey by heavy metals-protective effect of sulfide. *Applied Microbiology and Biotechnology*, 53, 726–731.
- Zhang, T, Liu, L., Song, Z., Ren, G., Feng Y, Han, X. & Yang, G. (2013). Biogas Production by Co-Digestion of Goat Manure with Three Crop Residues. *PLoS ONE*, 8 (6), 1-7.

Zhu, J., Zheng, Y., Xu, F. & Li, Y. (2014). Solid-state anaerobic co-digestion of hay and soybean processing waste for biogas production. *Bioresource Technology* 154, 240–247.

Table 2: Mean Biogas Production (ml/kg) During Eight Weeks of Anaerobic Digestion

Tmt	Week								Total
	1	2	3	4	5	6	7	8	
A	66.7 ^d	110.0 ^c	177.3 ^e	320.7 ^b	358.0 ^e	393.0 ^e	381.3 ^b	272.0 ^b	2079.0
B	62.0 ^e	105.0 ^d	214.0 ^d	304.7 ^d	376.7 ^d	415.7 ^d	314.0 ^c	239.0 ^c	2031.1
C	98.3 ^a	176.7 ^a	280.3 ^a	345.7 ^a	447.3 ^a	621.0 ^a	562.0 ^a	429.7 ^a	2961.0
D	86.7 ^c	150.0 ^b	221.7 ^c	315.7 ^c	396.7 ^b	462.3 ^b	345.3 ^c	263.3 ^b	2241.7
E	93.3 ^b	150.7 ^b	262.7 ^b	316.3 ^c	382.3 ^c	423.3 ^c	385.0 ^b	184.3 ^d	2197.9
Σ	407.0	692.4	1156.0	1603.1	1961.0	2315.3	1987.6	1388.3	11510.7

Means along each column bearing different superscripts are significantly different (P < 0.05) at 5% level by Duncan's New Multiple Range Test; Tmt = Treatment

Table 3: Temperature (°C) Variation of Samples during Eight Weeks of Anaerobic Digestion

Tmt	Week							
	1	2	3	4	5	6	7	8
A	29.8±0.3	36.6±1.5	40.3±1.9	42.7±0.1	43.2±0.4	43.5±0.3	35.7±0.6	28.5±0.3
B	28.7±0.5	32.3±1.4	34.6±0.9	36.3±0.8	38.4±0.2	40.5±0.3	33.8±0.1	27.9±0.2
C	30.4±0.7	35.7±0.4	38.2±0.4	39.0±0.5	42.5±0.3	43.2±0.3	36.6±0.2	29.8±0.3
D	30.4±0.2	36.8±0.9	37.3±0.5	38.9±0.4	40.4±0.3	42.0±0.7	34.9±0.6	28.6±0.5
E	30.3±0.1	38.9±0.8	41.5±1.1	42.8±0.4	43.5±0.3	44.1±0.3	36.4±0.2	27.6±0.2
MAT(°C)	24.3±2.0	27.0±3.0	27.0±1.3	26.3±2.1	25.0±3.3	22.6±1.1	24.9±2.04	28.7±1.8

Tmt = treatment; MAT = Mean Ambient Temperature

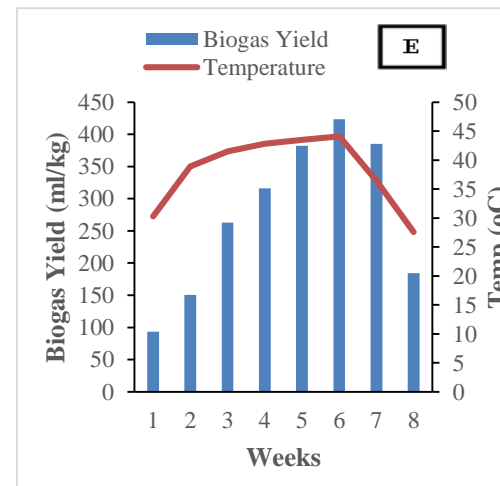
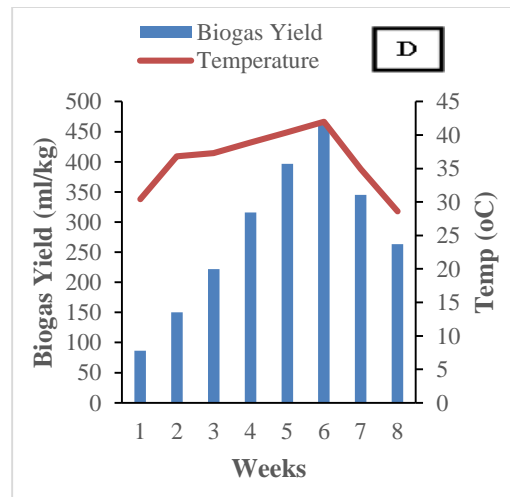
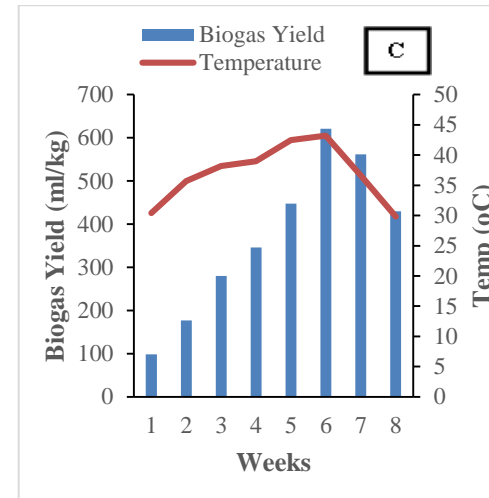
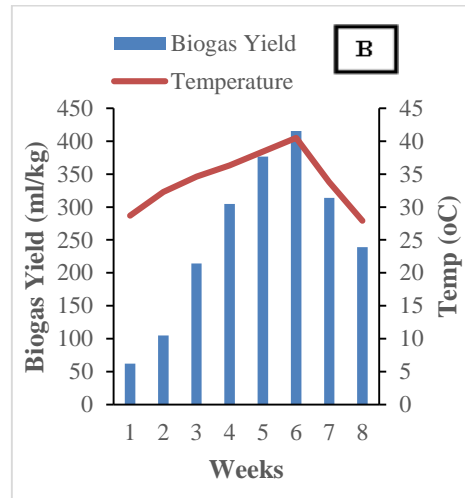
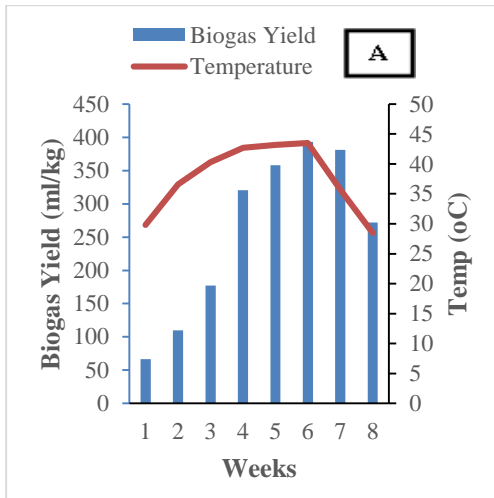


Figure 1: Effects of Temperature Variation on Volume of Biogas Production from treatment substrates A (0:1- poultry droppings+ cow dung); B(1:3-poultry droppings + cow dung); C(1:1-poultry droppings+ cow dung); D (3:1-poultry droppings+ cow dung) and E(1:0 – poultry droppings + cow dung)

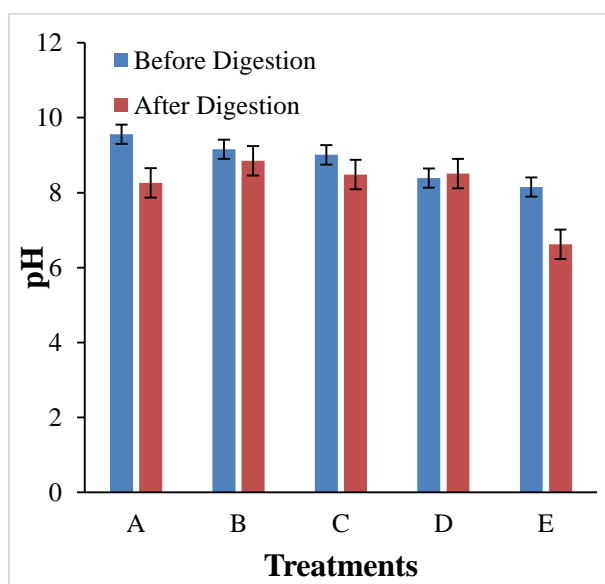


Figure 2: pH of Substrates before and after Digestion

Table 4: Effects of Anaerobic Digestion on some Heavy Metal (mg/kg) Contents

Tmt		Cu	Mn	Zn	Fe	Pb
A	BAD	11.25	157.00	443.75	1053.00	84.75
	AAD	33.75	0.11	0.04	2.37	11.25
	%EAD	200.00	-99.93	-99.99	-99.77	-86.73
B	BAD	18.00	250.00	533.25	1404.25	129.25
	AAD	15.25	0.04	0.15	0.89	16.00
	%EAD	-15.28	-99.99	-99.97	-99.94	-87.62
C	BAD	27.25	253.50	675.00	1988.50	147.25
	AAD	29.25	0.04	0.36	2.23	21.00
	%EAD	7.34	-99.98	-99.95	-99.89	-85.74
D	BAD	28.25	277.50	825.25	1724.25	50.00
	AAD	26.50	0.04	0.30	0.89	22.00
	%EAD	-6.19	-99.99	-99.96	-99.95	-56.00
E	BAD	33.50	296.00	846.50	1782.25	113.50
	AAD	45.50	0.07	0.61	2.31	48.25
	%EAD	35.82	-99.98	-99.83	-99.87	57.49

Tmt = treatment; BAD = Before Anaerobic Digestion; AAD = After Anaerobic Digestion;
 %EAD = Percentage Effects of Anaerobic Digestion.

Table 5: Carbon/Nitrogen Ratios of Experimental substrates Before and After Anaerobic Digestion

*Tmt	OC _{BAD}	TN _{BAD}	OC _{AAD}	TN _{AAD}	C/N _{BAD}	C/N _{AAD}	%C/N _{Red}	COD _B	COD _A	CODR (%)
								AD (x 10 ³)	AD (x 10 ³)	
A	35.75	1.94	23.70	1.82	18.43	13.02	29.35	31	23	25.81
B	45.33	2.12	22.14	1.91	21.38	11.59	43.65	26	21	19.23
C	31.92	2.49	15.54	1.96	12.82	7.93	38.38	27	19	29.63
D	51.71	2.51	16.27	1.94	20.60	8.39	59.27	54	25	53.70
E	37.03	2.59	22.65	1.82	14.30	12.45	12.94	41	27	34.15

OC= Organic Carbon, TN = Total Nitrogen, C/N = Carbon/Nitrogen ratio, %C/N_{Red}
 = Percentage Carbon/Nitrogen reduction due to anaerobic digestion,
 AD = anaerobic digestion; COD_{BAD} = Chemical Oxygen Demand Before Anaerobic Digestion;
 COD_{AAD} = Chemical Oxygen Demand After Anaerobic Digestion;% CODR =
 Percentage Chemical Oxygen Demand reduction.